


PCIe Intel JL82576EB Quad-Port Gigabit Server NIC

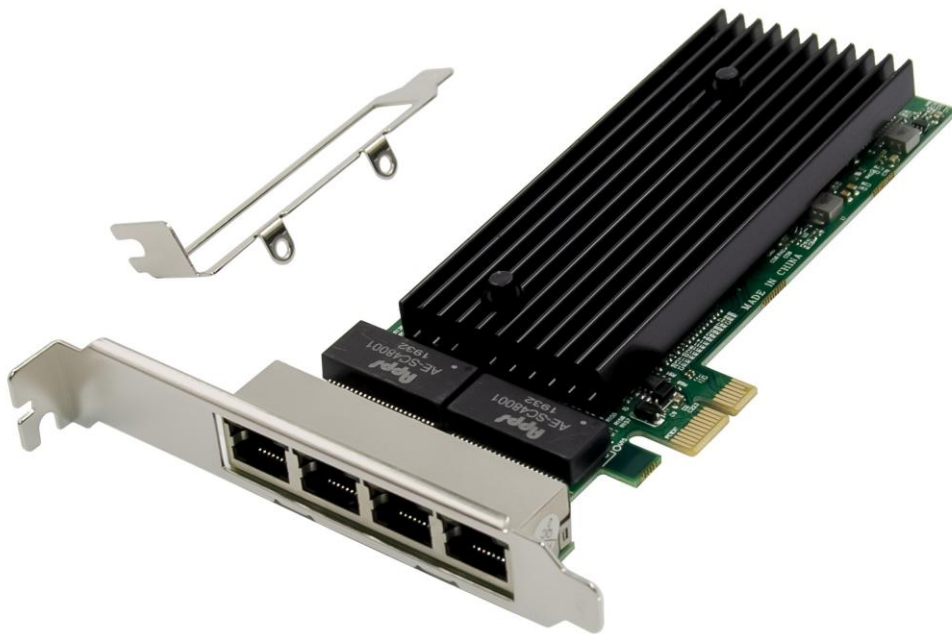

Description

PCIe JL82576EB Quad-Port Gigabit Network adapter adopts Intel a high performance Gigabit network controller JL82576EB ,By providing unparalleled features of virtualization, flexible features, and proven reliable performance, it solves the high requirements of the generation data center, it has Quad 1Gbps RJ45 port which can setup a long-distance link with a file server or a remote workstation.

Specification

- PCI-Express host interface specification v2.1 with 5GT/s BUS width
- Complies with PCI Bus Power Management Interface Specification Rev1.2
- PCI-Express lanes: x1
- Complies with Quad port 1GbE RJ45 port
- Onboard with 2xJL82576EB chipset
- Complies with the IEEE802.3ab ,IEEE802.3u and IEEE802.3 specifications
- Supports with 10/100/1000Mbps transmit speeds
- Half duplex at 10/100Mbps operation and full duplex operation at all supported speeds
- Layer 2 functions: IEEE 802.3x Flow Control - IEEE 802.1q VLAN
- Supports Receive-side scaling (RSS)
- Supports IPv 4, IPv 6 protocols
- Supports Jumbo Frames up to 9.5K
- Supports UDP.TCP and IP Checksum offloading
- Statistics for management and RMON
- Support for virtual machines device queues
- Next Generation VMDq Support (8VMs)
- Interrupt throttling control to limit maximum interrupt rate and improve CPU usage
- Chipset: Intel JL82576EB
- Drivers support for FreeBSD, Linux , VMWare ESXi, Win7/ Win-server2012/

Win-server2008/ Win8/Win8.1/Win-server2016/win10

Package content

- 1 x PCIe x1 JL82576EB Quad-Port Gigabit Network adapter
- 1 x User's Manual
- 1 x CD Driver
- 1 x Low profile bracket
- **Accessories**



System Requirements

- FreeBSD, Linux , VMWare ESXi, Win7/ Win-server2012/ Win-server2008/ Win8/Win8.1/Win-server2016/win10
- One available PCI Express x1/x4/x8/x16 slot

Cabling Requirements:

Intel 1 Gigabit adapters

- For 1000BASE-T or 100BASE-TX.use Category 5 or Category5e wiring, twisted 4-pair copper:
 - Make sure you use Category 5 cabling that complies with the TIA-568 wiring specification For more information on this specification.
 - Length is 100 meters max.
 - Category 3 wiring supports only 10Mbps

CAUTION: If using less than 4-pair cabling, you must manually configure the speed and duplex setting of the adapter and the link partner. In addition,with2-and3-pair cabling the adapter can only achieve speeds of up to 100Mbps

- For 100BASE-TX.use Category 5 wiring.
- For10BASE-T.use Category 3 or 5wiring

Hardware installation

1. Turn off the computer and unplug the power cord
2. Remove the computer cover and the adapter slot cover from the slot that matches your adapter
3. Insert the adapter edge connector into the slot and secure the bracket to the chassis
4. Replace the computer cover ,then plug in the power cord
5. Power on the computer

Install Drivers and software

Windows[®] Operating Systems

You must have administrative rights to the operating system to install the drivers.

1. insert the CD driver bound with Intel network driver into your CD-ROM drive(also you can download the latest drivers from [support website](#)):
2. if the Found New Hardware Wizard screen is displayed, click **Cancel**
3. start the autorun located in the software package, the autorun may automatically start after you have extracted files.
4. Click **install Drivers and Software**
5. Follow the instructions in the install wizard to finish it.

Installing Linux Drivers from Source Code

1. Download and expand the base driver tar file.
2. Compile the driver module.
3. Install the module using the modprobe command.
4. Assign an IP address using the ifconfig command.

Support

More information and settings, please refer to the Intel Adapter User Guides or you can contact us.